PRIVATE JACK™

priv' at jak' n. namesake of the famous Brisith canine and one of the most recognized British tones for guitar

Impedance	8 ohms
Power Rating**	50Wrms/100W peak**
Voice Coil Diameter	1.75", 44.5mm
Coil Material	Copper
Flat/Round Coil Wire	Round
Coil Former Material	Paper
Basket Type	Stamped
Cone Surround Material	Paper
Dust Cap Material	Zurette
Magnet Weight	38oz.
Usable Bandwidth (Fs to -3dB)	70Hz - 5.5kHz
SPL*	101dB*
	10145



Mounting Information

Nominal Basket Diameter
Baffle Hole Diameter
Mounting Holes Diameter
Mounting Holes B.C.D.
Depth
Shipping Weight

Thiele-Small Parameters

Impedance (Re)
Coil Inductance (Le)
Total Q (Qts)
Efficiency Bandwidth Product (EBP)
Voice Coil Overhang (Xmax)
Surface Area of Cone (Sd)


12.02", 305.2mm 10.97", 278.6mm 0.25", 6.4mm 11.63", 295.3mm 5.1", 129.5mm 10 lbs., 4.5 kg.

7.01 ohms 0.49mH 0.69 135 1.23mm 519.5cm²

Application Notes

"Thick and smooth, with lots of mids and extended highs. Very well balanced speaker. Classic British flavor."

Eminence Speaker
P.O. Box 360
Emiennce, KY 40019
USA
502.845.5622 phone
502.845.5653 fax
info@eminence.com
www.eminence.com

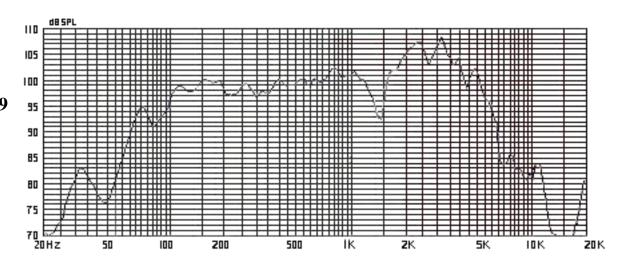

FORM 96251

^{*} Published sensitivity is an average of multiple points representing the measured output of the device (1W-1m) across the usable frequency range from 200Hz-5kHz.

^{**} EIA 426A noise source and test standard. Eminence voice coil technology often results in guitar speakers that dramatically exceed the power rating of other manufacturer's products. Such ratings are not meant to imply the Eminence woofers are not equally suitable for lower-power "Class A" valve amplifiers as they are for high gain valve and transistor amplification.